


Installation Instructions for Static Roof Vent TILE ROOF




Tools Required for
installation:

- Small Angle Grinder with Stone Wheel
- Hammer
- Silicone gun and silicone

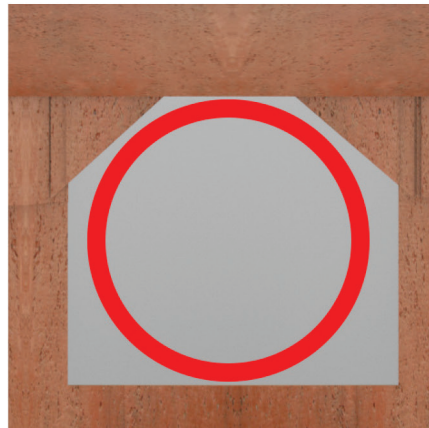


Remove several tiles
from the location where
Roof Vent will be
positioned. You may need
to cut some tiles with an
angle grinder.

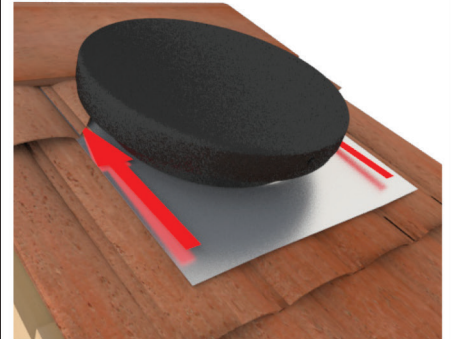

*Slide the top of the
soaker tray under the top
row of tiles and the sides
and bottom of the soaker
tray sit above the tiles.
The Roof Vent should
now be positioned with
the opening located over
the hole in the tiles.*



Gently form the bottom
and side edges of soaker
tray to profile of the tiles.

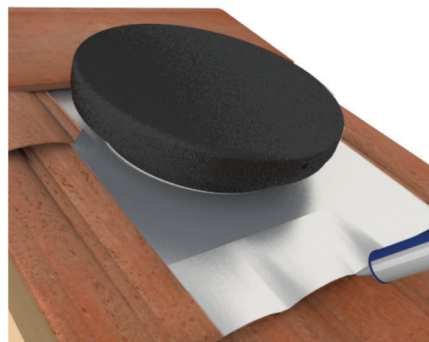

Seal under bottom and
side edges with silicon.